





### 100% Acrylic

These Laminates are entirely made of acrylic polymers without additives, resulting in long lasting quality and transparency.



# 1.5MM Segment

The laminates are available in 1.5 mm thickness & 8x4 feet size.



#### **Borer Free**

Our laminates are resistant to attacks by termites and other borers.



#### Water & Stain Proof

A special coating on the surface ensures our laminates stay water and stain resistant for years.



# Easy to Install

The sheets are seamless and integrate very well, making the installation easy.



#### **Scratch Resistant**

The surface is toughened to prevent scratch formation even after years of installation.

# **ABOUT FRIKLY**

Frikly is the one-stop destination for home interior products. We offer the market's most affordable prices, FREE nationwide delivery, and the widest catalogue.

Headquartered in Nagpur, Maharashtra, Frikly embodies trust, reliability, and consumer satisfaction at its core. We are backed by the founder, CEO, and former COO of Wayfair, one of the leading e-commerce platforms for interiors and renovation across USA, Canada & Europe. Finding the right choice for your dream home interiors should not be tedious. Therefore, Frikly's mission is to make international standard interior products available to you without any hassle. Our products reach you in secure flexi plywood packaging, from warehouses located in all prime metro cities. This ensures you receive your order wherever you are across the country.

Place an order by clicking the "Get Quote" button. You may order our Physical Catalogues as well.

Just WhatsApp or Call us at +91-8600011431.



**Lower Prices** than the Local Market



Catalogue of 15 Lakhs+ Products




**50,000+**Deliveries Fulfilled



Delivered Across 10,500+ Pincodes



**75000+** Satisfied Customers

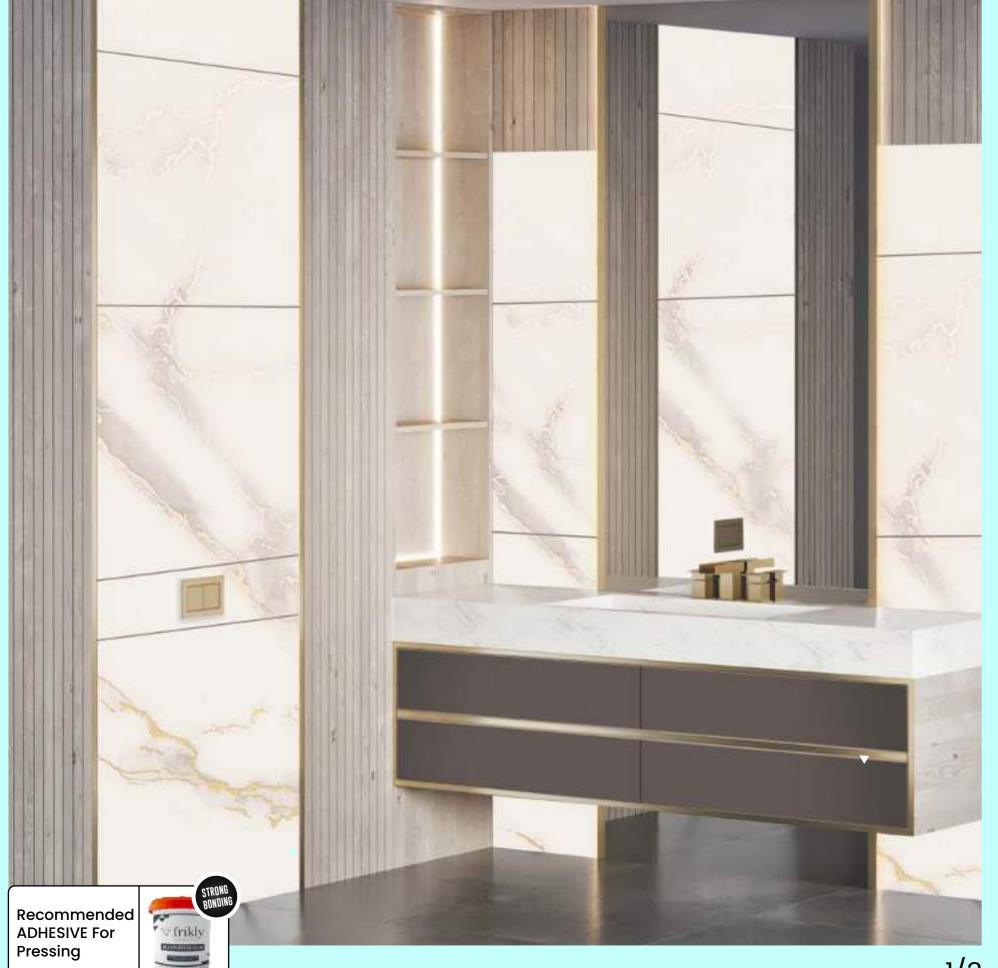






















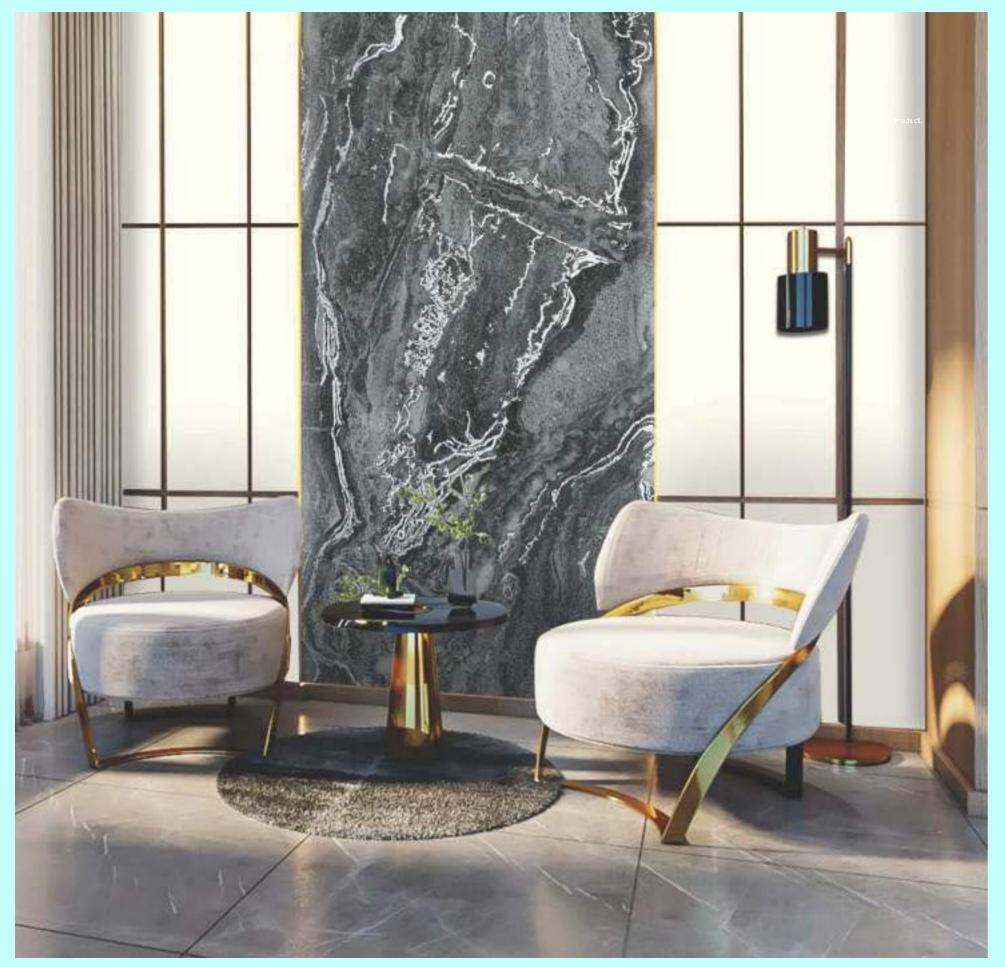

















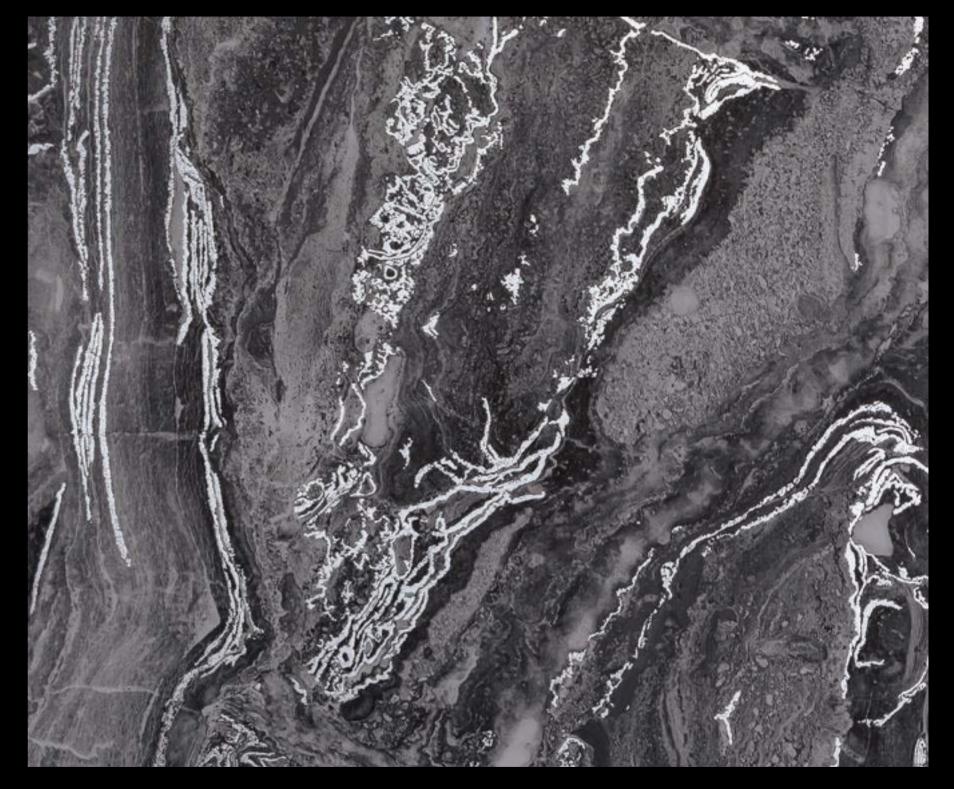























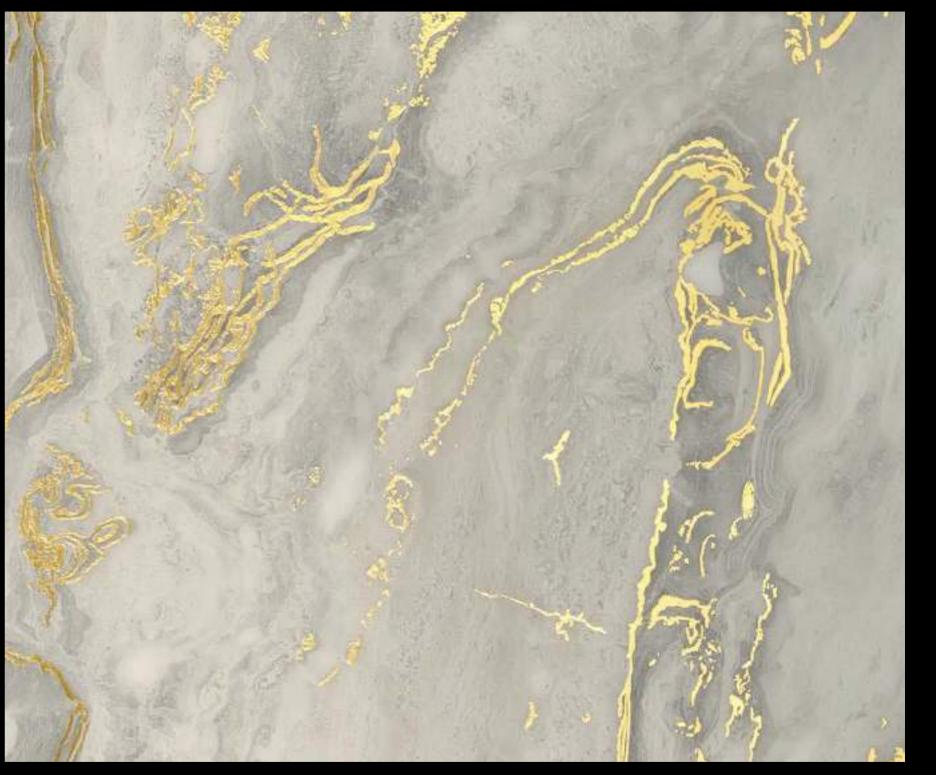







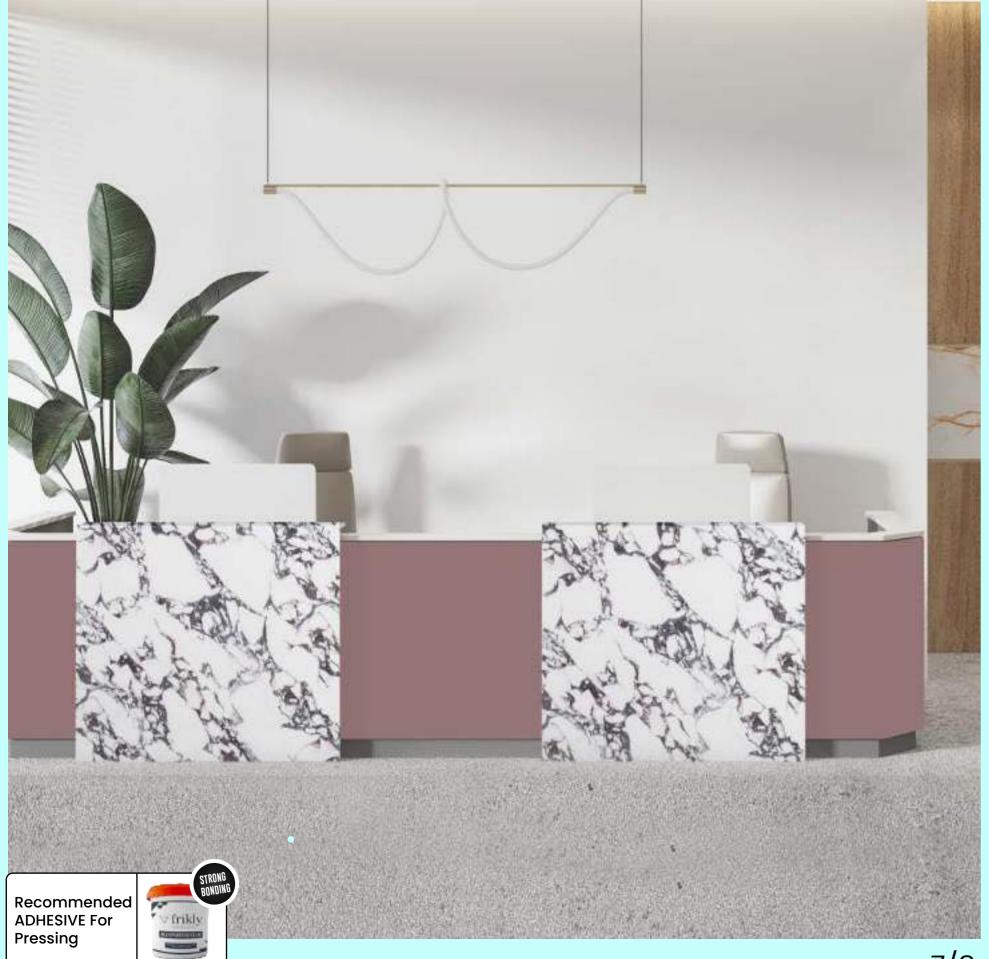
















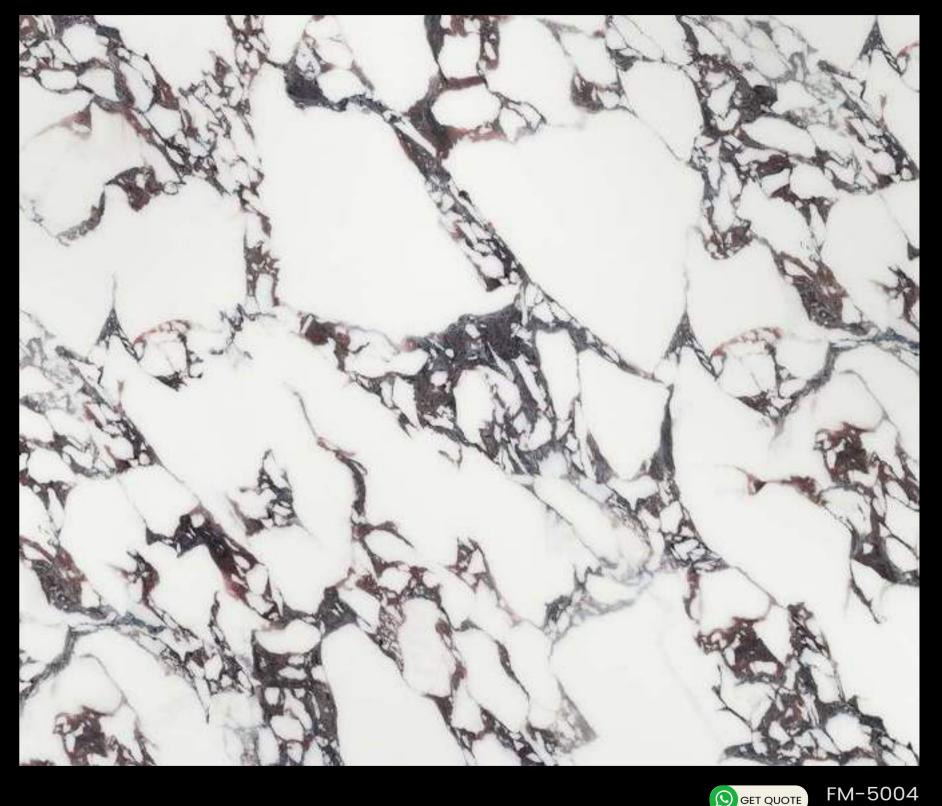







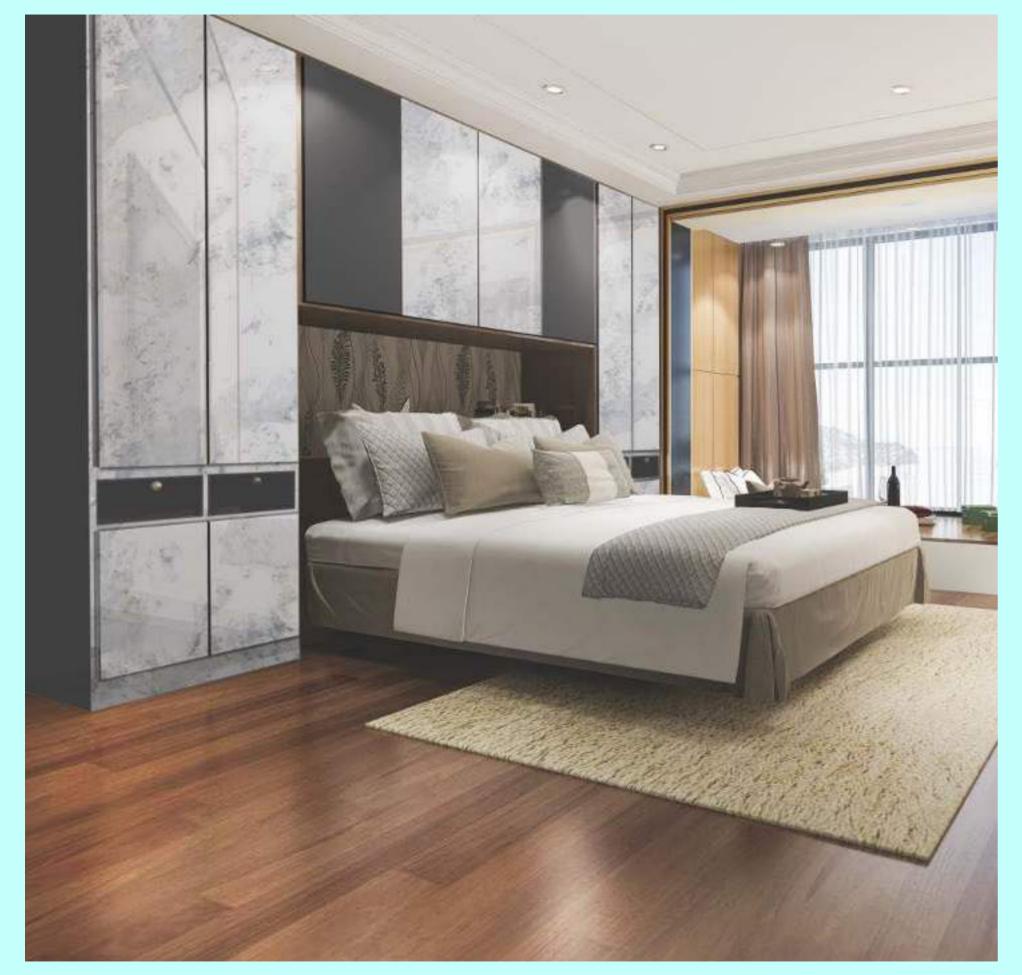
































































FM-5007




















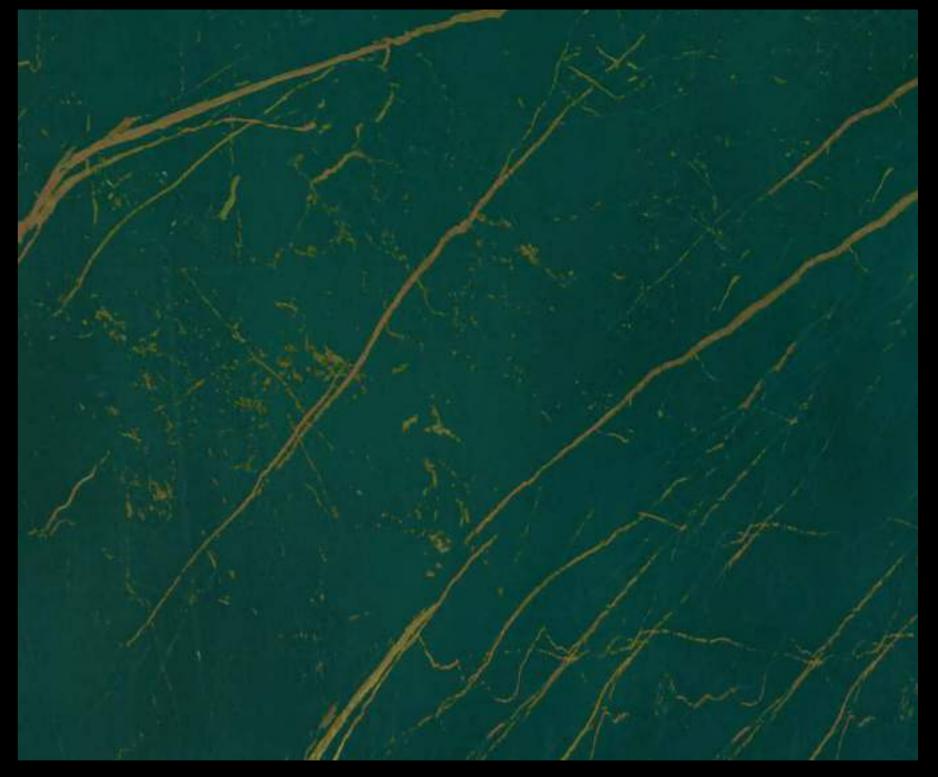





















































































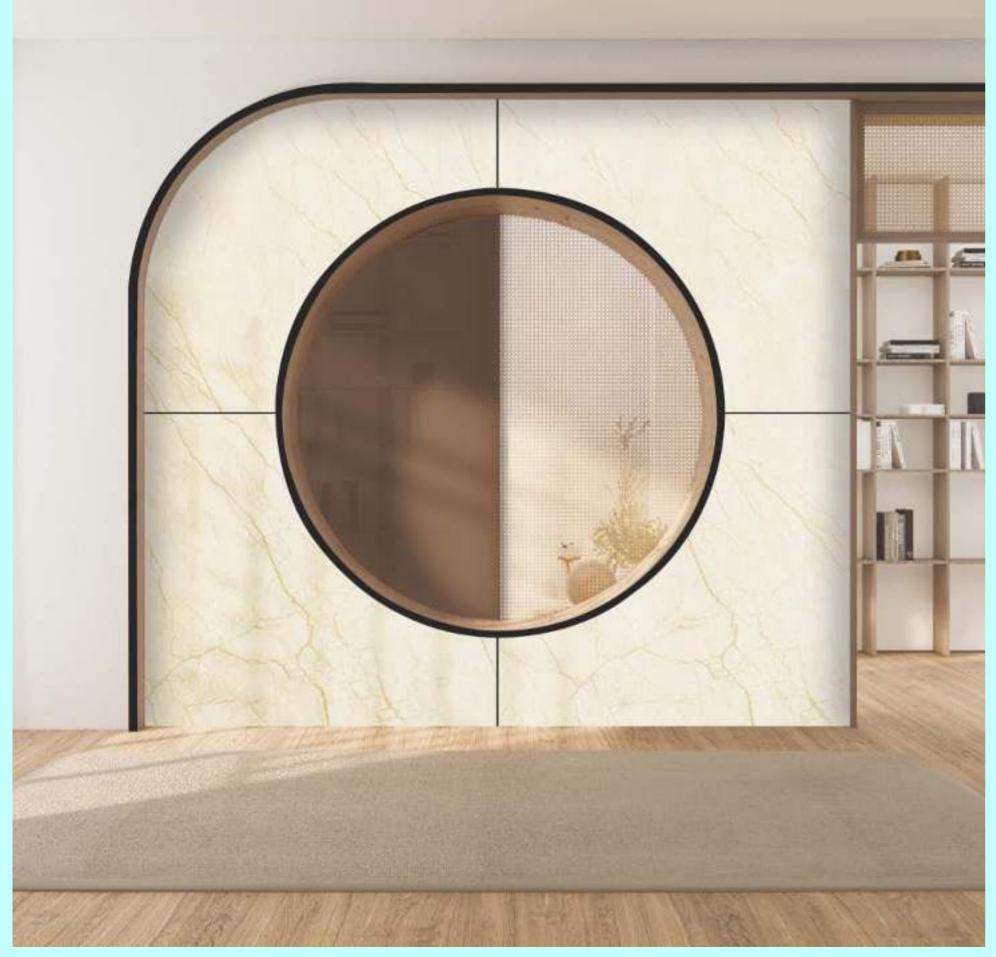
























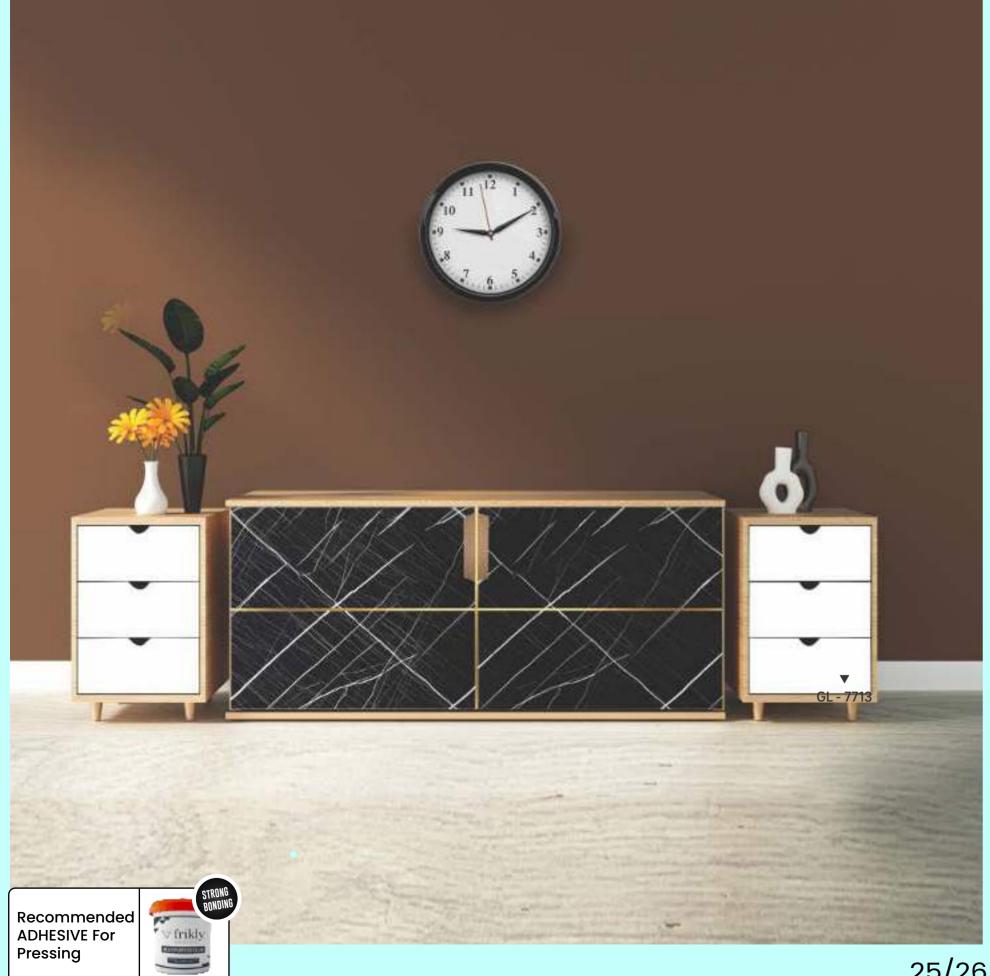














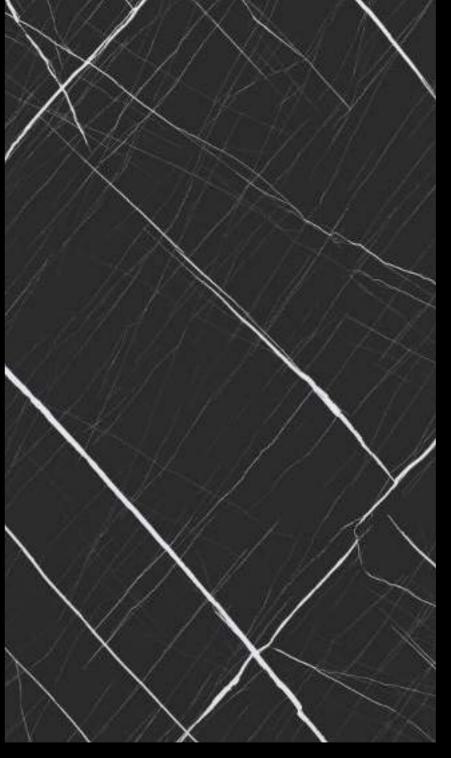






























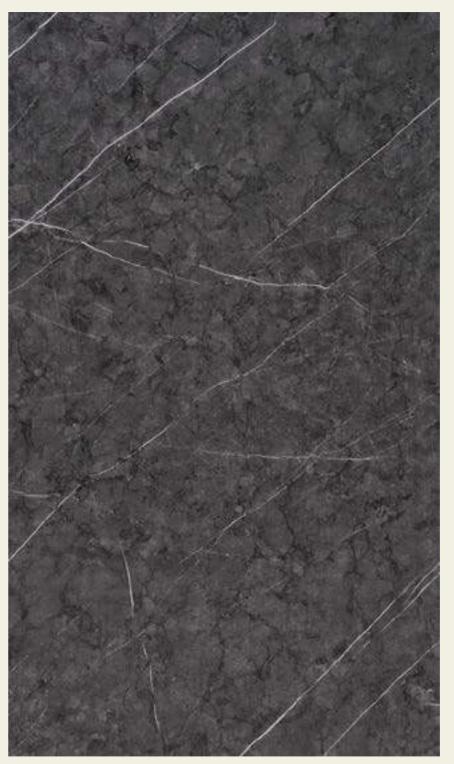






© GET QUOTE FM-5020



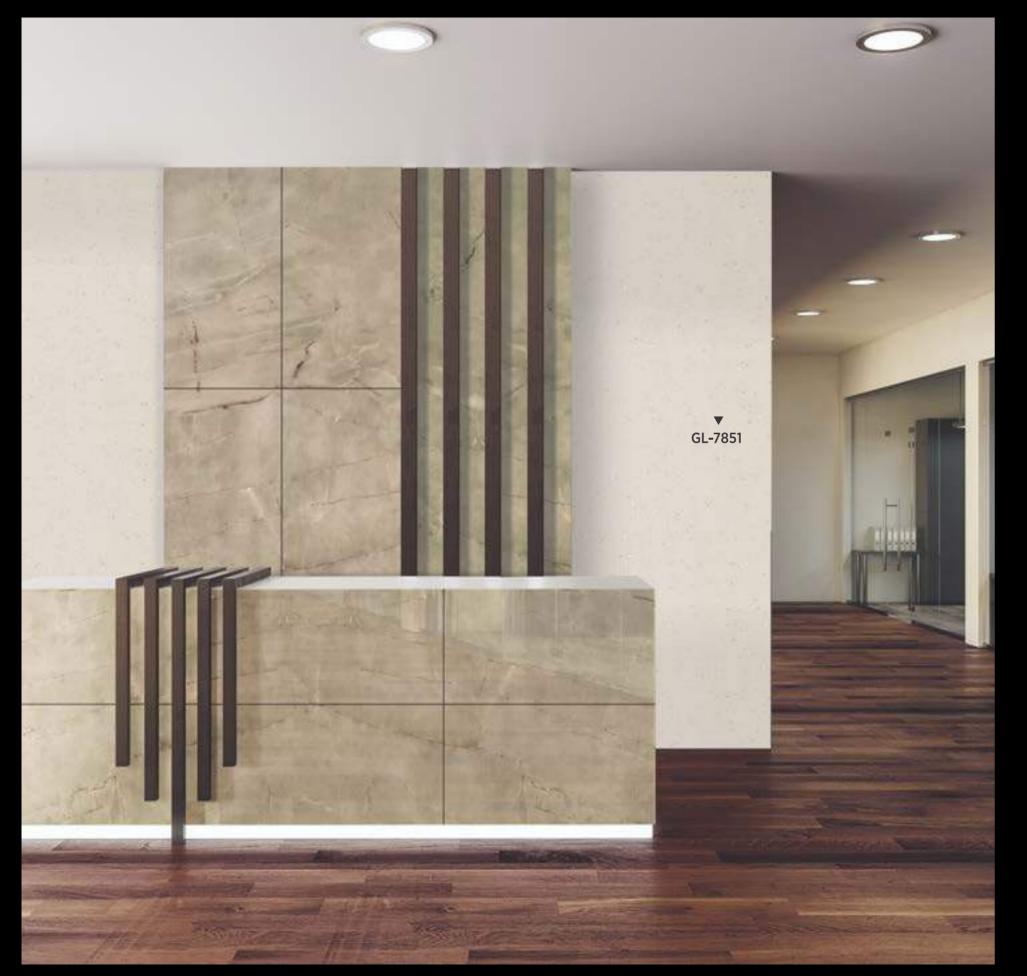





















© GET QUOTE FM−5022



















































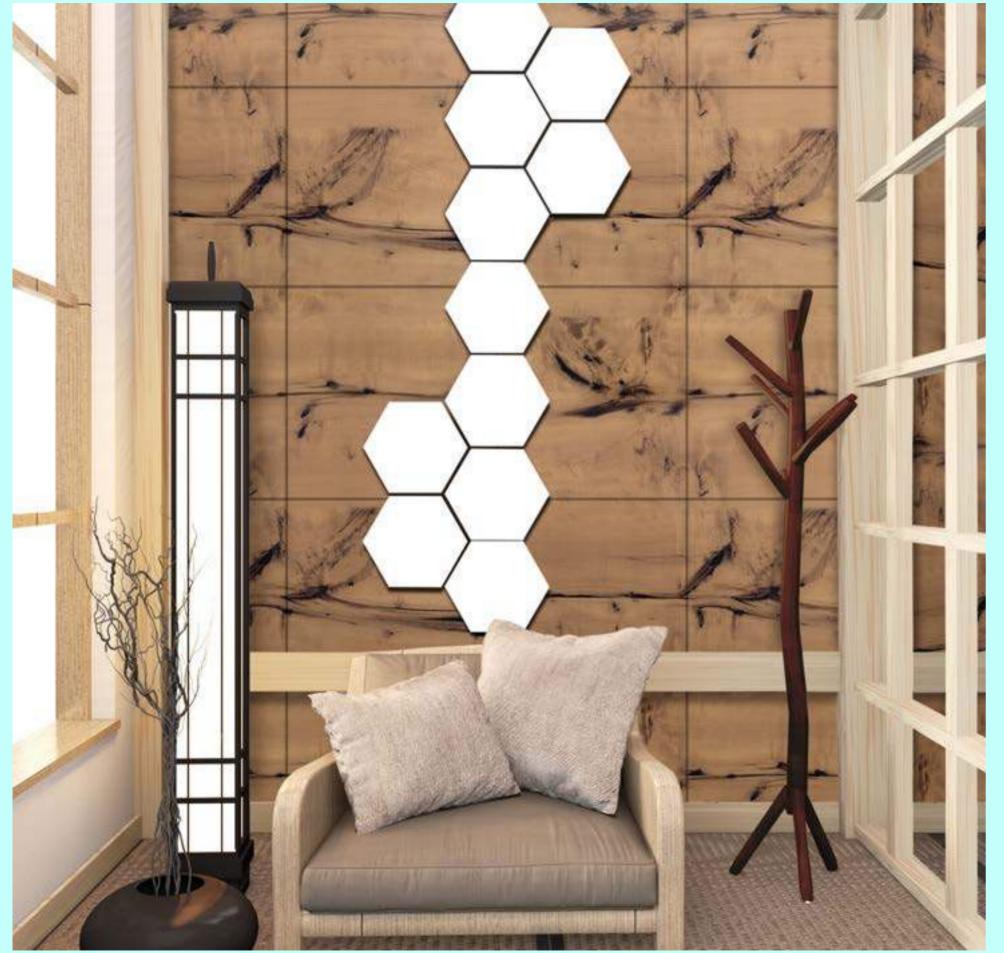






































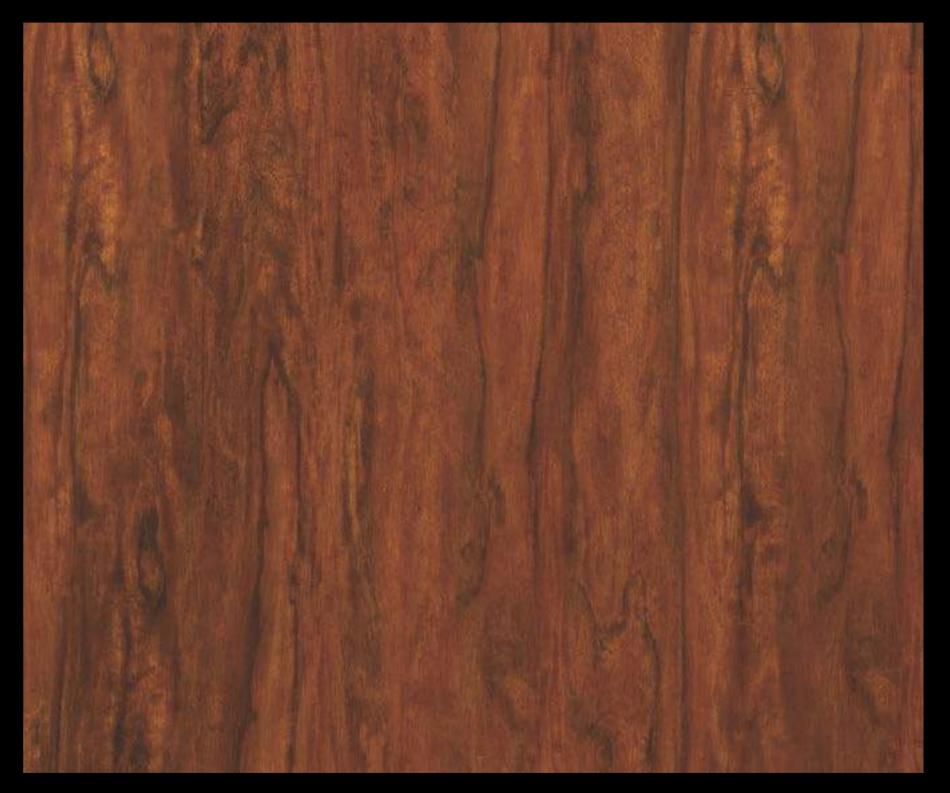






















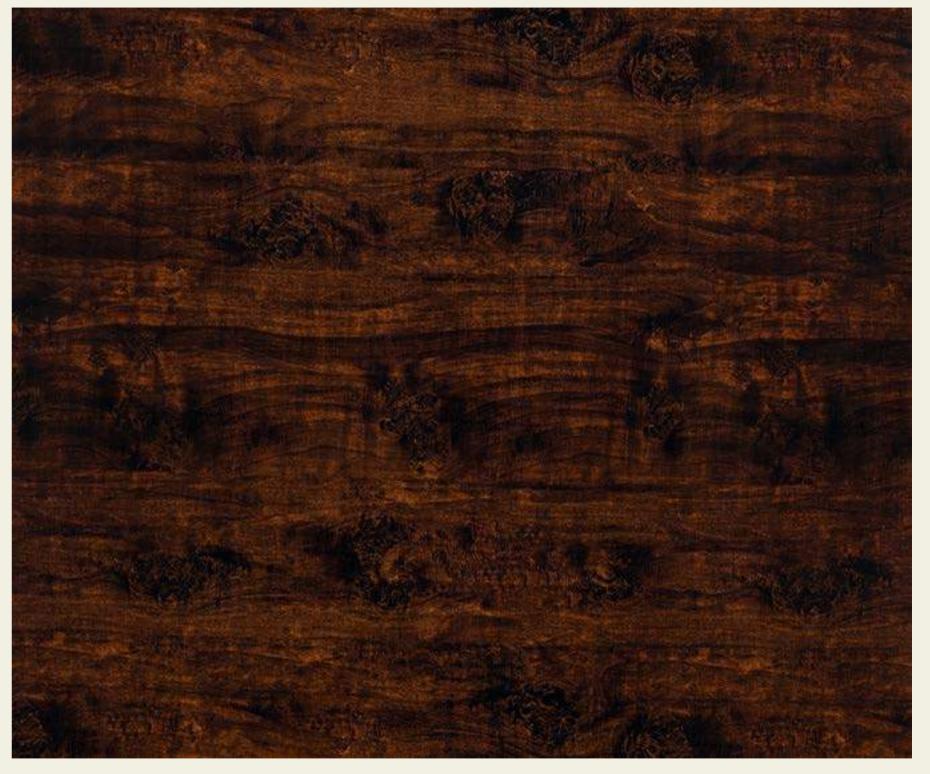



© GET QUOTE FW−304


















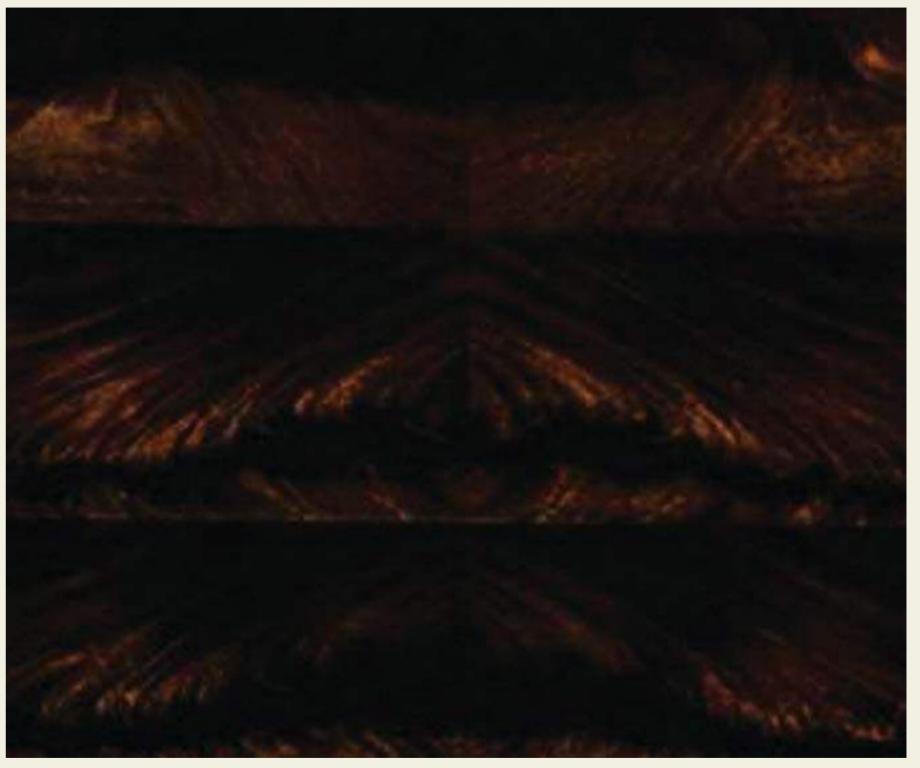

































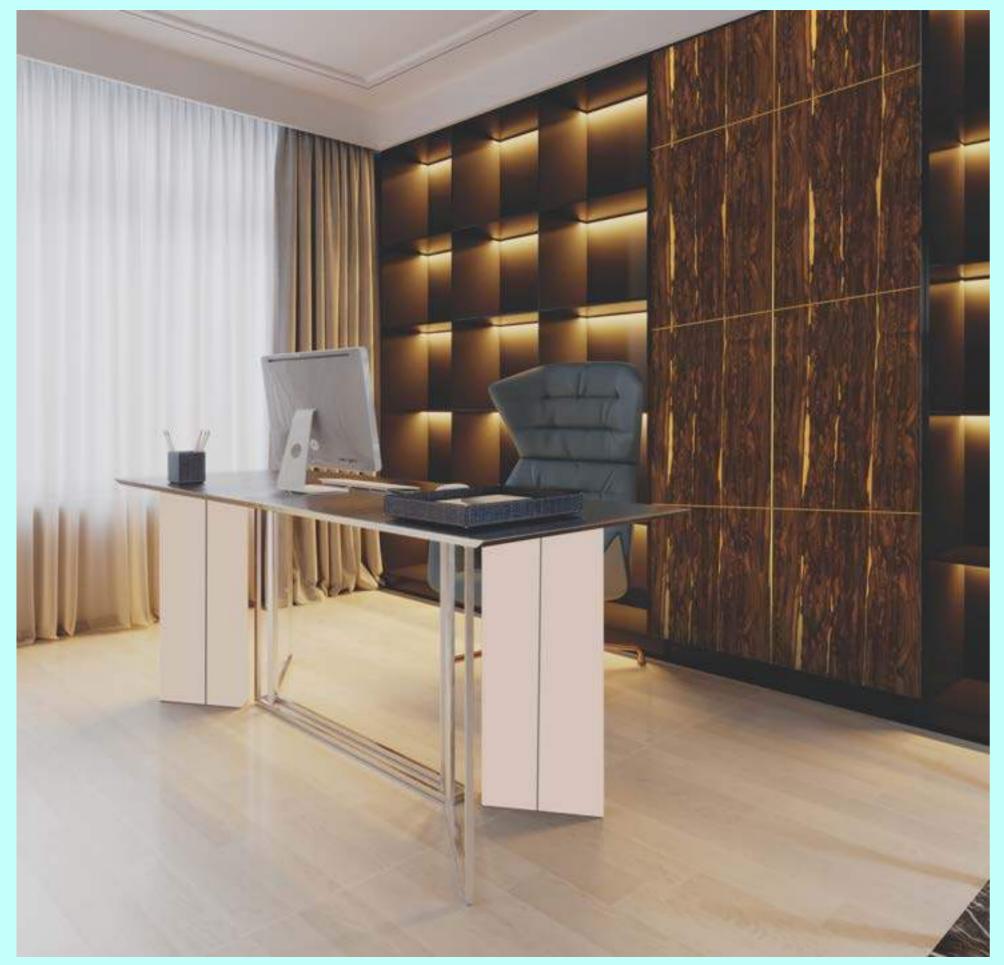













































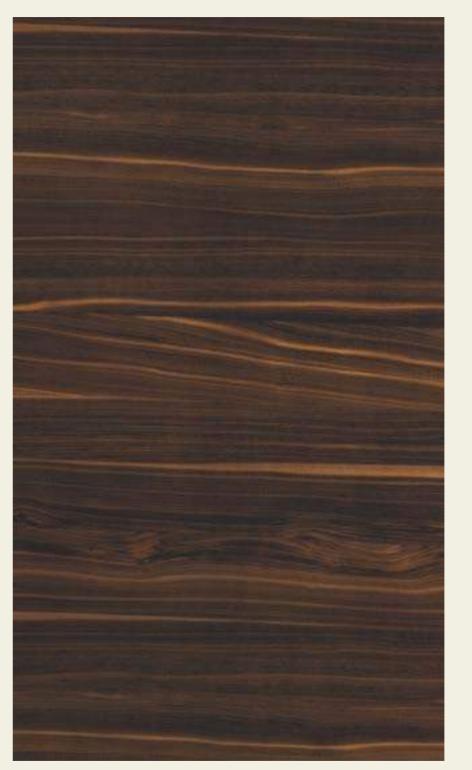

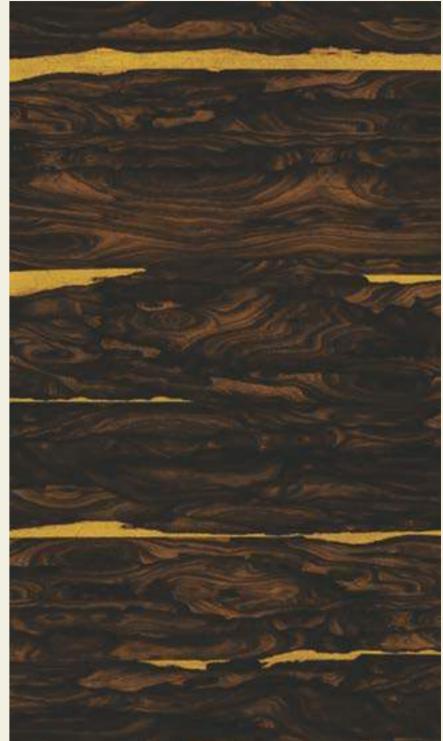



























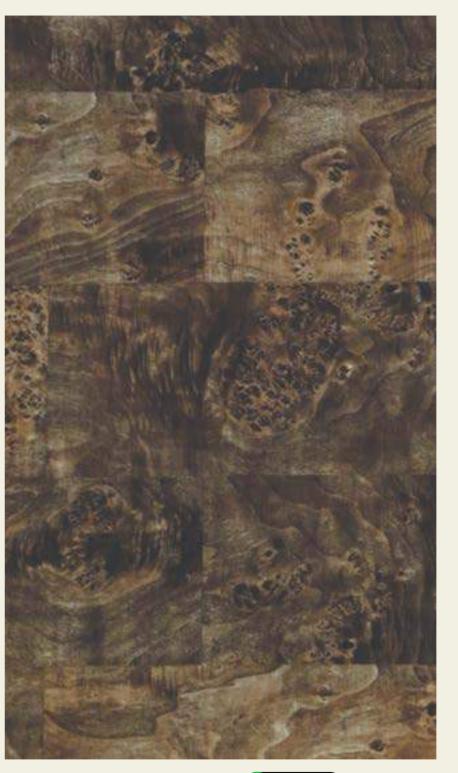

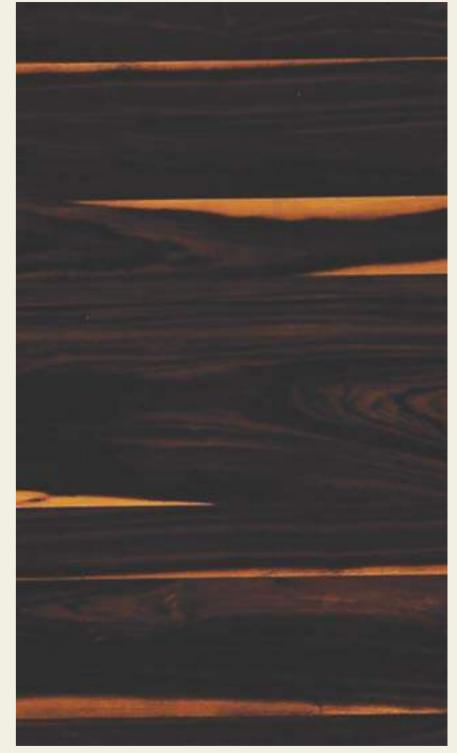



FW-313
























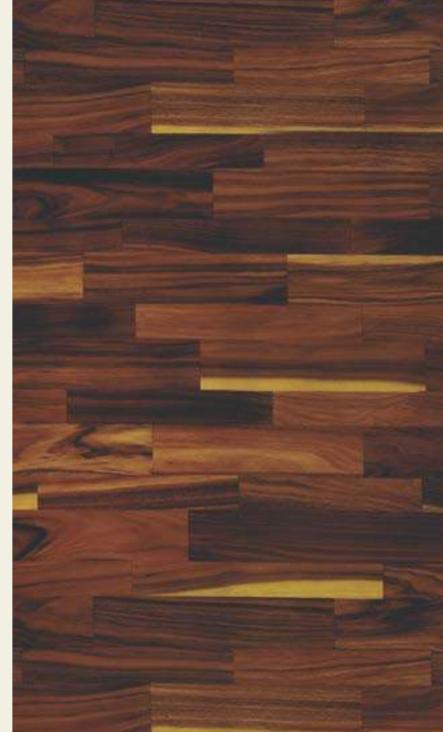































FM-5026





#### **CLEANING INSTRUCTION & MAINTENANCE**

Atticus acrylic laminates have a high quality protective film which is only removed at the completion of all installation work. After removal of the film, the solvent of adhesive coating still remains on the surface of the laminates. Dust is likely to settle on the surface at this stage.

Curing out a laminate surface involves allowing the applied resin to fully harden.

This often requires sufficient time (approx. 72 hours) so that the resin sets and reaches its optimal strength. Temperature and humidity can influence the curing time.

To speed up the process, clean the surface with a glass cleaner like Colin and a soft microfiber cloth.



SHAKE WELL AND LIGHTLY SPRAY ON THE SURFACE.



WIPE THE SURFACE CLEAN IN CIRCULAR MOTIONS, WITH A MICROFIBER CLOTH.

#### WARNING

Avoid using the following products for cleaning:

- Alcohol Based Cleaners
- Solvent Based Cleaners
- Petrol, pinewood, or oil based cleaners
- Non-microfiber cloths

# **AVAILABLE IN**

• Size: 2440 × 1220 mm (8ft × 4ft)

• Thickness: 1.5 mm





#### WHY DO AIR BUBBLES FORM ON LAMINATES?



Substrate losing moisture after installation



Debonding due to uneven



Using extremely large sheets (larger than 4ft × 4ft) bonding process



pressing during

## CAUSES OF YELLOW PATCHES AND COLOUR FADING **AFTER INSTALLATION**





plywood/lipping patti, which may chemically relate with






Exposure to high temperature

# FRIKLY WARRANTY

Imported products do not come with a warranty

from the supplier, therefore we do not provide any warranty/guarantee either. Application errors, weather problems, and low-skill workmanship may cause cracks and air bubbles in the laminates. We do not entertain complaints or claims for such damages. In case of manufacturing defects, the claims will be entertained up to one year from the date of purchase.


# WHY DO CRACKS OR STRETCH LINES FORM ON ACRYLIC LAMINATES?



Rolling up acrylic laminate sheets while storing can cause cracks and stretch lines.

To avoid this, unroll the packaging within 2-3 days of receiving the delivery.



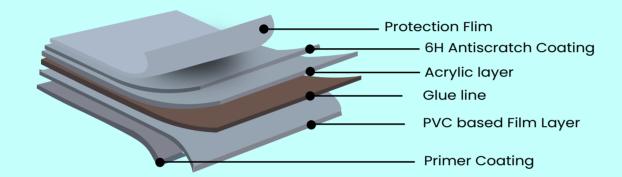

# PARAMETER COMPARISON

Parameters	Atticus Acrylic Laminate	High Gloss Laminate Mica	PU coating/ Duco Paint	
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	NO	NO	NO
Color Consistency	Excellent	Not good	Not good	Not good
Orange peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	NO	YES	YES	YES

<sup>\*</sup>There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminate sheet may vary from this brochure.







# More Products on Frikly









**1** Friklyindia









Friklyindia







It is advisable to use material from the same batch, as there might be colour variation in the material from different batches.

